




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H05B 41/10	A1	(11) International Publication Number: WO 98/53648 (43) International Publication Date: 26 November 1998 (26.11.98)
(21) International Application Number: PCT/EP98/03016 (22) International Filing Date: 18 May 1998 (18.05.98) (30) Priority Data: MI97A001185 21 May 1997 (21.05.97) IT (71)(72) Applicant and Inventor: REVERBERI, Giorgio [IT/TT]; Via Pavoni, 5, I-42035 Castelnovo Ne' Monti (IT). (74) Agent: RICCARDI, Sergio; Riccardi & Co., Via M. Melloni, 32, I-20129 Milano (IT).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: CENTRALIZED POWER REDUCING DEVICE, PARTICULARLY FOR LIGHTING INSTALLATIONS

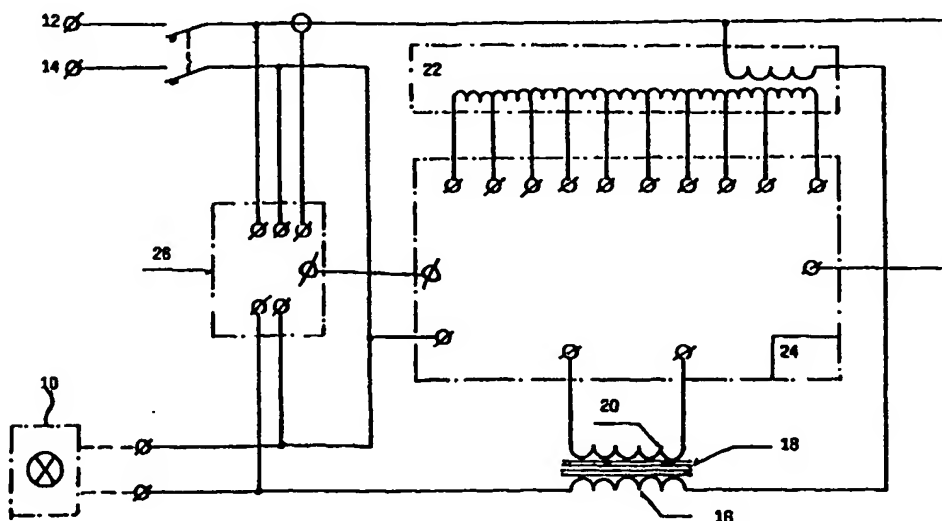

(57) Abstract

Disclosed herein is a centralized power reducing device, particularly for lighting installations, comprising, on each phase of the installation power source, a winding (16) in series with load (10), wound on a magnetic core (18), the current supplied to load (10) flowing therethrough, a second winding (20) wound on said magnetic core (18), a drive or control current flowing therethrough, means (22, 24) for changing said drive or control current and characterized in that said means (22, 24) for establishing the extent of the drive or control current in said second winding (20) are comprised of a multiple-tap autotransformer (22), the connection of said autotransformer (22) taps occurring by means of relays (24) controlled by a logic unit (26).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	BS	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

"CENTRALIZED POWER REDUCING DEVICE, PARTICULARLY FOR LIGHTING INSTALLATIONS"

The present invention relates to a centralized power reducing device, particularly for lighting installations.

5 Road lighting installations, or those intended for big industrial and sporting areas involve the need of being able to change the luminous intensity as a function of the real use requirements, in order to be able to effect a remarkable saving of electric energy and lengthen the life of the lamps.

10 Indeed it is recognized that in public lighting installations the luminous intensity required and absolutely necessary during the first night-hours is excessive after a certain time, and if not reduced, becomes an unnecessary waste of energy. Moreover, during the same night-hours, due to the stay in producing activities, the mains voltage tends to rise above the voltage rating, thus reducing the life of the lamps.

15 The known systems for reducing the luminous intensity of public lighting installations are basically grounded on the use of an autotransformer for changing the voltage on the load (lamps). In the first known solution, the primary winding of the autotransformer comprises some parallel shunts by means of which, through properly connected switches, the power supplied to load is discretely changed with coarse values of the changes. The drawback of this solution is therefore that the lamps are subject to a series of stresses, jeopardizing the life thereof. The second known solution provides for continuously changing the power supplied to the lamps, however using devices with moving, wiper contact arrangements (for example, a VARIAC). Thus, they are inclined to wear, seizing and other drawbacks typical of moving parts, including the requisite of periodical controls in order to check the wear of sliding parts, inclined to wear, and the proper alignment of moving parts.

20 Object of the present invention is to provide a power reducing device able to integrate the merits of both the mentioned arrangements, namely adapted to work in a discrete manner, but still able, by virtue of a precise calibration of the intervention steps, to progressively reduce or increase the power supplied to the lamps of a lighting installation without abrupt voltage changes, both at the initial light-on, and at the final light-off time, while keeping a simple and reliable structure, therefore having an economical construction and servicing.

30 This problem is solved by a centralized power reducing device, particularly for lighting installations, according to claim 1. Further advantageous characteristics of said

device are recited in the depending claims.

The characteristics, objects and advantages of the present invention will be clearer from the following description, and the attached drawings relating to a non limiting embodiment example. Obviously, same reference number in the various Figures refer to
5 same or equivalent parts.

The Figures show:

Fig. 1: a diagrammatic illustration of a lighting system with a centralized power reducing device according to the present invention being applied thereto;

Fig. 2: a diagrammatic illustration of a relay board showed in Fig. 1; and

10 Fig. 3: a diagrammatic illustration of the control circuit of the device in Fig. 1.

With reference to Fig. 1, a lighting system is shown, modeled as a load lamp 10, fed by monophasic alternating current taken between a phase 12 of a three-phase current circuit and the neutral phase 14 thereof.

In series with load 10 there is a winding 16, which impedance affects the voltage
15 supplied to the load. Winding 16 is wound on a magnetic core 18, a second winding or drive winding 20 being also wound thereon.

Adjustment of the power supplied to load 10 is based on adjustment of the impedance of winding 16, in turn a function of the current flowing through drive winding 20. Indeed, impedance of winding 16 will be zero when core 18 has reached
20 magnetic saturation by means of drive winding 20, a situation arising when a determinate drive or control current is forced through said drive winding 20, just corresponding to core saturation. In this situation the voltage drop across winding 16 will be zero. For lower values of the drive or control current, down to zero, saturation of core 18 correspondingly decreases, and correspondingly the impedance of winding 16
25 increases, up to a maximum value to which corresponds the maximum drop of the voltage feeding the load.

According to the invention, the drive or control current is supplied to winding 20 by means of an autotransformer 22 having multiple regulation taps leading to a relay control board 24. By properly combining the opening and closing positions of the
30 individual relays of board 24 it is possible to accomplish the change of the magnetizing current flowing through winding 20, and therefore achieve a voltage supply at load 10 less or higher than the mains rated value. It is also provided a by-pass subcircuit so that in the event of a malfunctioning of the switching relays or intervention of internal protections, the system will automatically set to by-pass position, without requiring

external switching members.

In multi-phase arrangement application, not described in detail because it merely consists of applying an identical device between each phase and the neutral, the by-pass position can be reached by only one phase, while the others operate regularly according to what has been programmed in a manner which will be described later. The by-passed phase keeps in any case a fixed reduction step of 25 V in order to avoid that, even in the most unfavorable situations, the voltage will exceed the lamp rated values. Therefore the system operates in a "fail safe" logics.

A further peculiar aspect of the device according to the invention is the possibility, by virtue of the taps of autotransformer 22, of being inserted in supply arrangements having different voltage ratings, for example of 277 - 220 - 208 - 120 V, and frequencies of 50/60 Hz, simply by changing an internal connection.

The advantages of the device according to the invention are multiple:

- digital commutation
- reduced dissipated power
- low servicing
- very quick response times
- tolerances of output voltages definable as a function of the number of the code switching elements
- no harmonic distortion.

The functional control of the switching relays of board 24 is carried out by a microprocessor unit 26, responsive to the external situations received by suitable signal transducers, as a luminosity probe 52 (cfr. Fig. 3), a photoelectric cell, a fog or traffic probe, etc.

Fig. 2 diagrammatically shows a preferred embodiment of board 24, allowing the number of autotransformer 22 taps required for covering the use field to be reduced. To this end board 24 comprises a switching section 242, advantageously working without creating any electric arc, and a section 244 adapted to invert the voltage on winding 20. Thus, the fixed 25 V voltage reduction also used for the by-pass function as mentioned above, can be added to or subtracted from the change which can be obtained by means of the autotransformer 22 taps, for example 45 V as a maximum. Consequently the operative voltage output from the regulator spans from +20 V to -70 V with respect to the input voltage.

Said microprocessor unit 26 also comprises means adapted to graduate the

operation of autotransformer 22 to determine such suitable rise and descent ramps of the voltage supplied to load 10 that the latter is preserved from too abrupt voltage changes and rushes. The same means are used to keep the output voltage steady with variable input voltage.

5 Moreover such means as to reset the operating program of said system can be advantageously provided for, so that, in the event of current failure, it will start again from the situation relating to the first lamp switch-on, acting with due graduality whatever the transducer position might be.

10 The block diagram of the control part of the device according to the invention is diagrammatically illustrated in Fig. 3, where various modules are shown: microcontroller 26, a random access memory 28, a read only memory 30, and an erasable programmable memory 32, a clock/calendar 34, a communication port 36 and a modem 38, a second communication port 40, particularly for the connection to expansion modules for multi-phase execution, a display unit 42 and a data input unit 44,
15 an analog transducer unit 52 such as a luminosity, fog, or traffic probe and the like, an analog output 54, one or more bus-connected relay boards 24, and inputs 46, 48 e 50 for the upstream voltage, downstream voltage and line current, respectively.

20 By means of the data input unit 44, a computer connected to communication port 36 or via modem 38, memory 28 can be programmed for custom operating cycles with respect to standard operating cycles, based on clock/calendar 34, in turn managed by microcontroller 26.

25 It is obvious that many changes, adaptations, integrations, variations and replacements can be made to the embodiment example described hereinbefore in an illustrative and non-limiting sense, still without departing from the scope of the invention as defined by the following annexed claims.

CLAIMS

1. Centralized power reducing device, particularly for lighting installations, comprising, on each phase of the installation power source, a winding (16) in series with load (10), wound on a magnetic core (18), the current supplied to load (10) flowing therethrough, a second winding (20) wound on said magnetic core (18), a drive or control current flowing therethrough, means (22, 24) for changing said drive or control current, characterized in that said means (22,24) for establishing the extent of the drive or control current in said second winding (20) are comprised of a multiple-tap autotransformer (22), the connection of said autotransformer (22) taps occurring by means of relays (24) controlled by a logic unit (26).

2. Device according to Claim 1, characterized in that said logic unit (26) controls said relays (24) in such a way that switching of the multiple taps of said autotransformer (22) occurs without generating any electric arc, thus safeguarding the contact life in the years.

3. Device according to Claim 1 or 2, characterized in that said logic unit (26) comprises means adapted to graduate the operation of said switching relays (24) to obtain the desired rise or descent ramps of the voltage supplied to load (10) and maintaining it steady, within the set values, even with variable input voltage.

4. Device according to any of the preceding Claims, characterized in that said logic unit (26) is programmable according to user's needs.

5. Device according to any of the preceding Claims, characterized in that said logic unit (26) receives signals from external transducers, such as a luminosity probe (52), a fog probe or a traffic probe and controls said relays (24) as a result.

6. Device according to any of the preceding Claims, characterized by a subcircuit by-passing autotransformer (22), adapted to be inserted by said logic unit (26) as a result of system anomalies.

7. Device according to any of the preceding Claims, characterized in that the switching taps of said autotransformer (22) are movable, the device being therefore connectable with electric distribution arrangements having different voltage ratings.

8. Device according to any of the preceding Claims, characterized in that the relays (24) comprise a section (244) adapted to invert the output voltage of said autotransformer (22) before adding it to a fixed reduction of the input voltage, the voltage across winding (20) therefore changing with respect to the device input voltage in a range spanning from a reduction equal to the sum of said fixed reduction and the

maximum output voltage of autotransformer (22) taken as negative, to an increase equal to the difference between the maximum output voltage of said autotransformer (22) taken as positive and said fixed reduction.

9. Device according to Claim 8 when depending from Claim 6, characterized in
5 that said fixed voltage reduction is generated by said by-pass subcircuit.

1 / 3

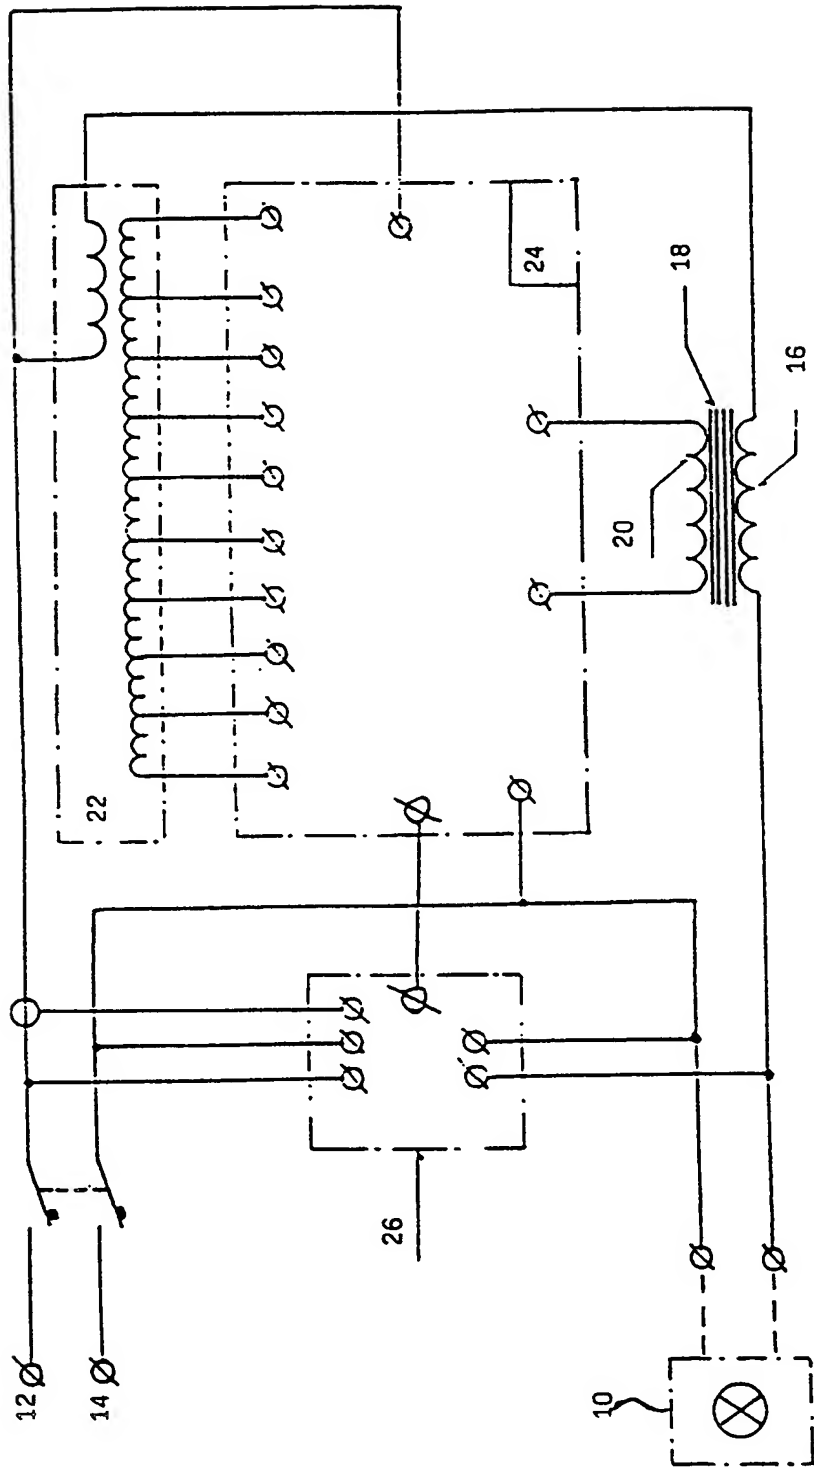


Fig. 1

2 / 3

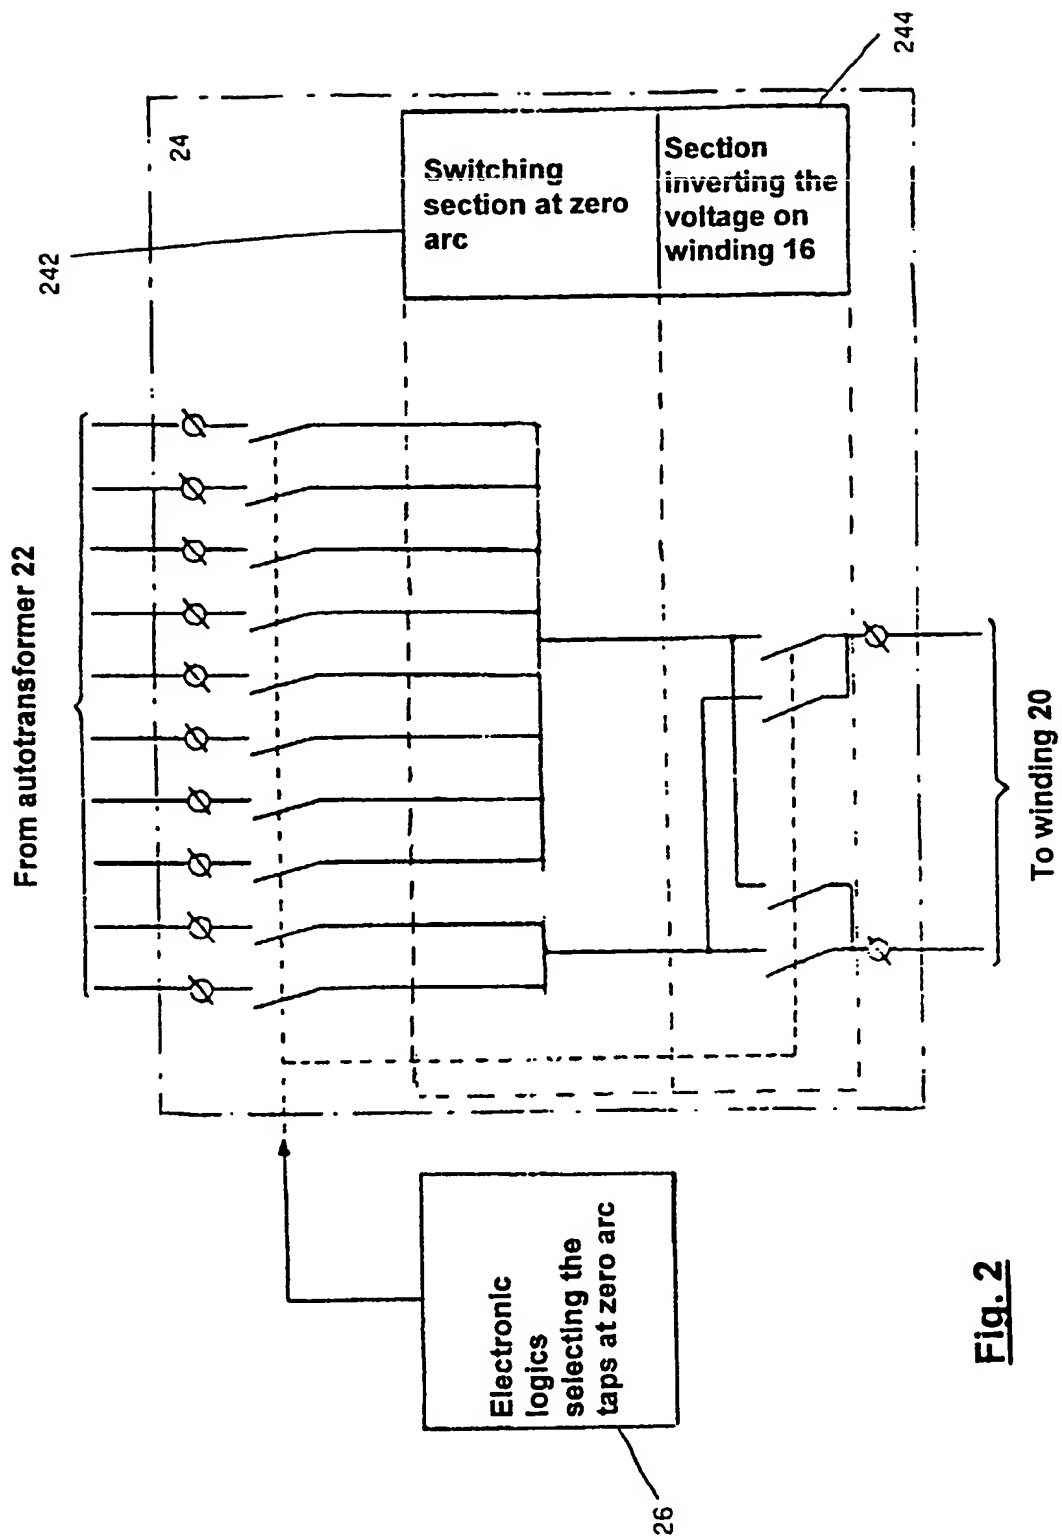


Fig. 2

3 / 3

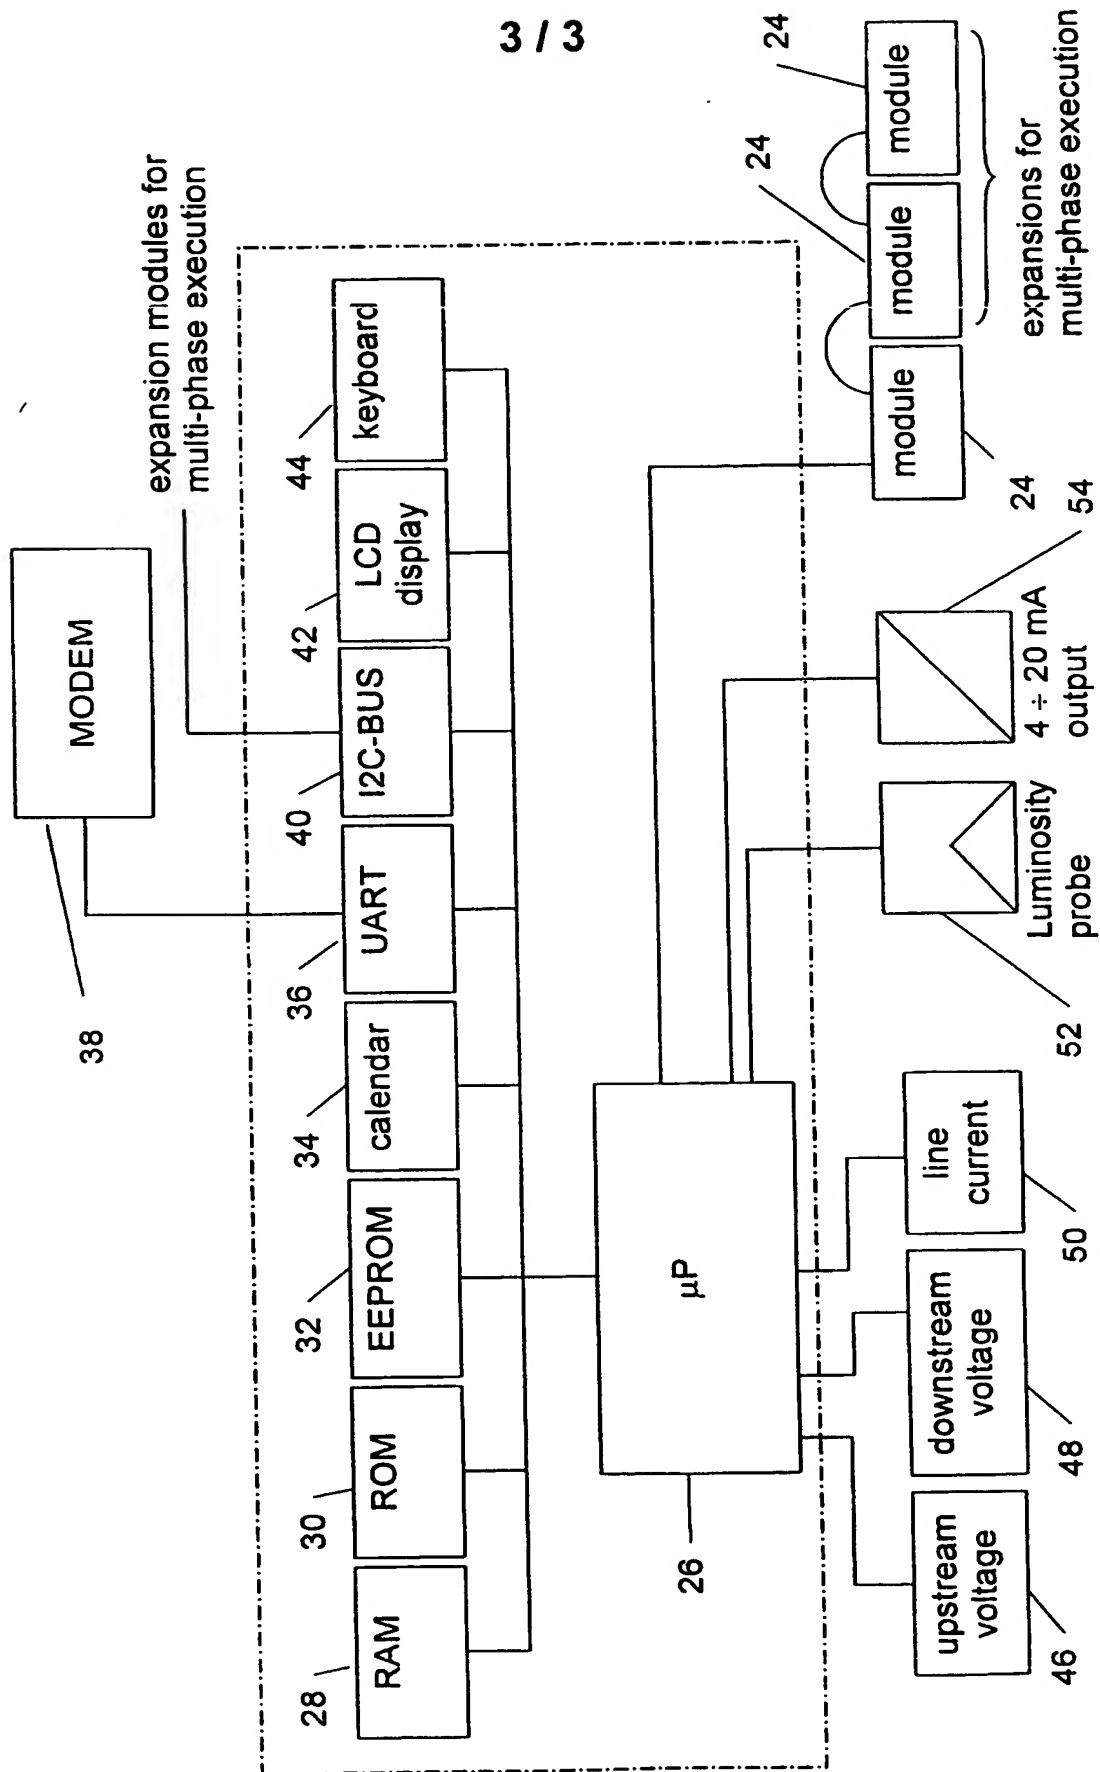


Fig. 3

INTERNATIONAL SEARCH REPORT

b. national Application No

PCT/EP 98/03016

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H05B41/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H05B H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 027 764 A (SPIE BATIGNOLLES) 29 April 1981 see page 6, line 34 - page 14, line 25; figures 1-5	1,7
A	US 4 189 664 A (HIRSCHFELD RICHARD L) 19 February 1980 see column 3, line 23 - column 6, line 46; figures 1-3	1,3-5
A	EP 0 617 443 A (MOLEX INC) 28 September 1994 see abstract	2
A	US 2 961 579 A (R.B. RONEY ET AL.) 22 November 1960	
A	US 3 091 720 A (E.J. HUBERTY) 28 May 1963	

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "d" document member of the same patent family

Date of the actual completion of the international search

29 September 1998

Date of mailing of the international search report

06/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 opo rd,
Fax: (+31-70) 340-3016

Authorized officer

Albertsson, E

INTERNATIONAL SEARCH REPORT

Int. National Application No

PCT/EP 98/03016

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of the relevant passages	Relevant to claim No
A	FR 2 495 877 A (MEROT SODEX SA) 11 June 1982 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/03016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0027764 A	29-04-1981	FR 2468276 A DK 423880 A FI 803193 A JP 56096493 A PT 71933 B	30-04-1981 24-04-1981 24-04-1981 04-08-1981 31-08-1981
US 4189664 A	19-02-1980	NONE	
EP 0617443 A	28-09-1994	US 5359486 A JP 2704496 B JP 6314534 A	25-10-1994 26-01-1998 08-11-1994
US 2961579 A	22-11-1960	NONE	
US 3091720 A	28-05-1963	NONE	
FR 2495877 A	11-06-1982	NONE	